

AUTOMATIC OR STATIC GOAL

BPC-49940-2/GA



SPECIFICATIONS

- TYPE:----- DIGITAL
- DISPLAY:----- 4-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
- CHARACTER HEIGHT:----- 4" (101.6 mm) 9 THOUSAND 9 HUNDRED AND 99
- VISIBILITY:----- 250 Ft. (76.2 METERS)
- POWER REQUIREMENTS: 100-240V 50~60Hz (12 vdc Switching Transformer)
- FRAME:----- 15.25" x 18.25" x 1.5" ALUMINUM (BLACK ANODIZED)
- WEIGHT:----- 4.5 lbs.
- OPERATING TEMP.:----- -17° TO 190° F
- HUMIDITY:----- 0% TO 95% NON-CONDENSING

OPERATING MODE ----- COUNT UP OR DOWN BY ONE, TO FAST SET UP OR DOWN HOLD THE KEY DOWN FOR 5 SEC, TO RESET TO ZERO HOLD BOTH KEYS DOWN FOR 5 SEC, THE GOAL CAN COUNT DOWN FROM 99min 59sec OR A STATIC DISPLAY OF THE GOAL.


15 ft. CABLE



ACTUAL COMPLETED




MOUNTING INSTRUCTIONS

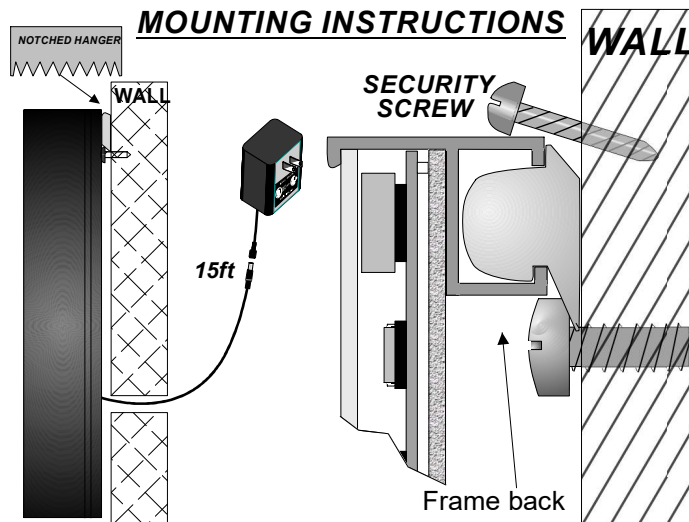

BPC-49940-2 Setting Instructions


Switchbox Used For:

- Counting up and down on Actual
- Resetting Actual

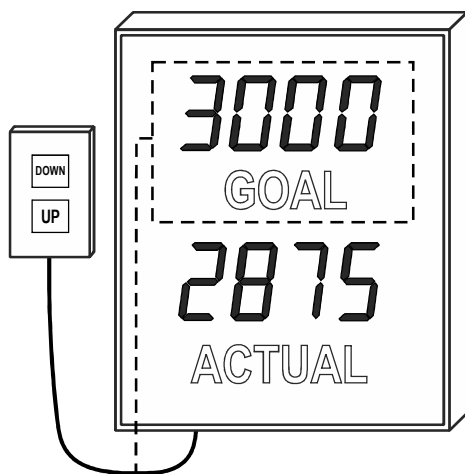

IR Remote Used For:

- Switching Between Takt Timer and Static Goal Display
- Setting Takt Time & Goal
- Run and Pause Takt Time

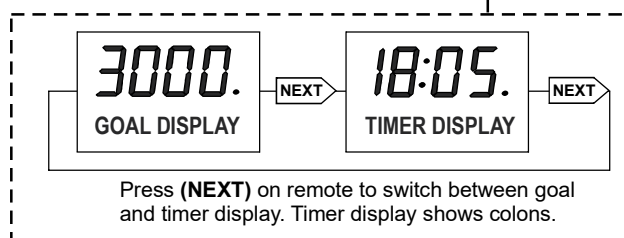

If remote batteries are replaced, or if display does not respond to remote:

- 1 Press and hold **(SETUP)** until remote LED stays on.
- 2 Press **(CLOCK)**.
- 3 Enter clock code **(0712)** on keypad.

Switchbox

To Count Up or Down:

Press **(UP)** switch once to count up by one.
Press **(DOWN)** switch once to count down by one.

To Fast Count:

Press and hold **(UP)** switch for over 3 seconds to fast count up.
Press and hold **(DOWN)** switch for over 3 seconds to fast count down.

To Reset to Zero:

Press and hold both **(UP)** and **(DOWN)** switches down for over 5 seconds to reset.

IR Remote

To Switch Between Goal Counter & TAKT Timer:

Press **(NEXT)**. Takt Timer will have time colons.

To Run Goal/Timer or Put on Hold:

Goal/Timer is on hold when LED dot on right side is flashing. To put on hold, press **(HOLD)**. To run, press **(HOLD)** again.

To Set Goal Starting Point:

When the Goal display is on hold, press **(ENTER)**. Digits will flash. Key in start number.
If you make an error, press **(STOP)**. Press **(Enter)** again to accept.

To Set Countdown Timer:

When the Takt timer display is on hold, press **(ENTER)**. Digits will flash. Key in start time in minutes and seconds.
If you make an error, press **(STOP)**. Press **(Enter)** again to accept.

To Reset Goal Counter & Takt Timer:

When Goal/Takt Timer display is on hold, press **(LOAD)** once to reset both at the same time.