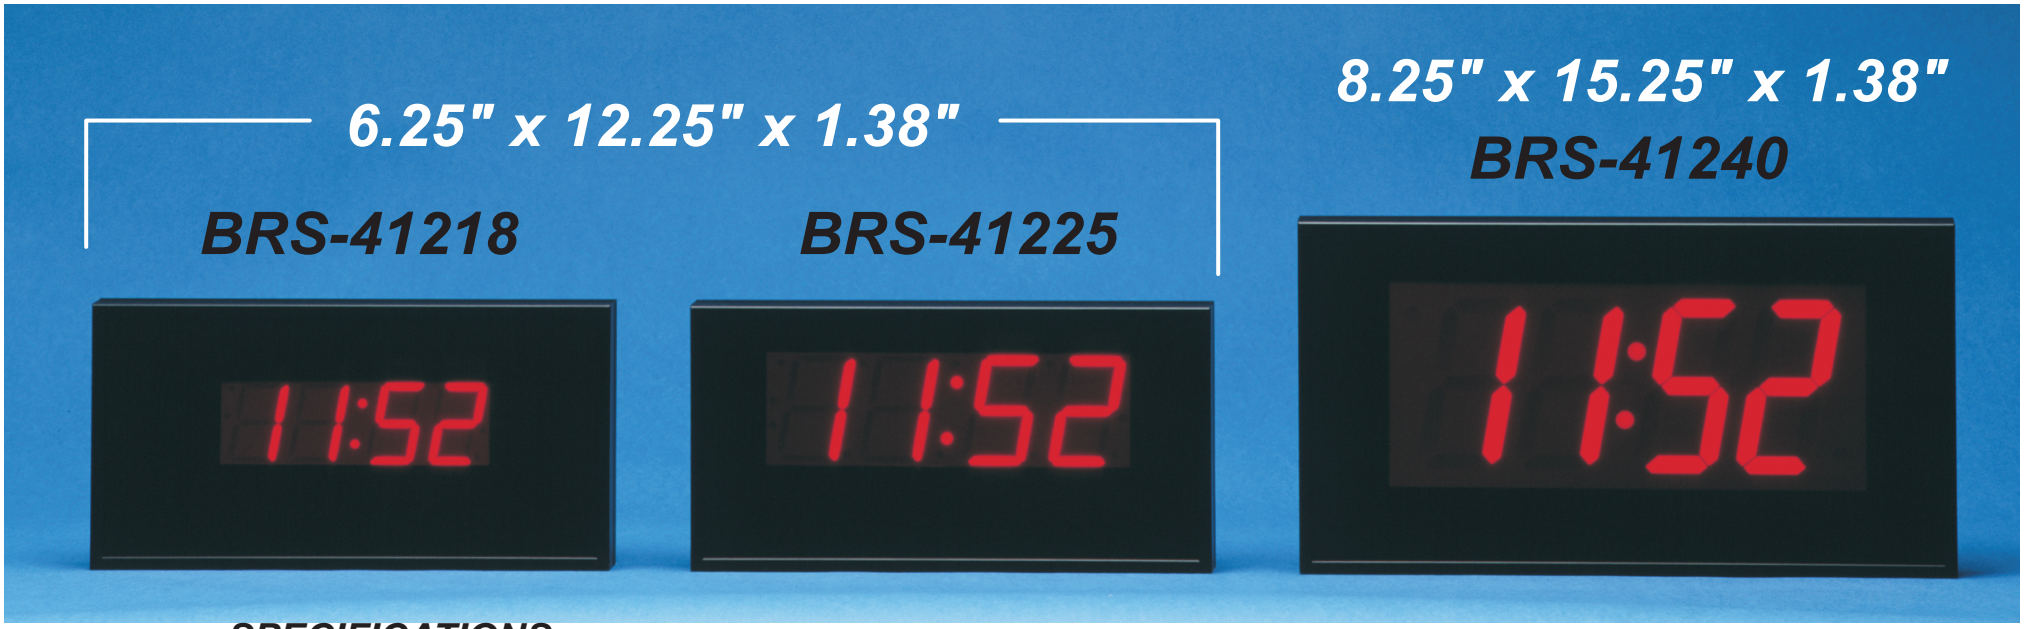

SPECIFICATIONS

TYPE: ---------- DIGITAL
DISPLAY: ---------- 4-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
CHARACTER HEIGHT: ------- 4" (101.6 mm) HR. MIN.
VISIBILITY: ---------- 200 Ft. (60.96 METERS)
POWER REQUIREMENTS:-- 1500 ma AT 9 VAC ***(CLASS 2 TANSFORMER SUPPLIED)***
FRAME: ---------- ALUMINUM (BLACK ANODIZED FINISH)
DIMENSIONS: ---------- ***SEE ABOVE***
WEIGHT: ---------- 4.25 lbs.
OPERATING TEMP.: ---------- -17° TO 182° F
HUMIDITY: ---------- 0% TO 95% NON-CONDENSING
OPERATING MODE:---------- 12 or 24 HOUR SELECTABLE, AUTOMATIC DAY LIGHT

BRS-41240
BRS-42440

INTERNAL OR EXTERNAL TRANSFORMER
CUSTOMER TO SPECIFY.

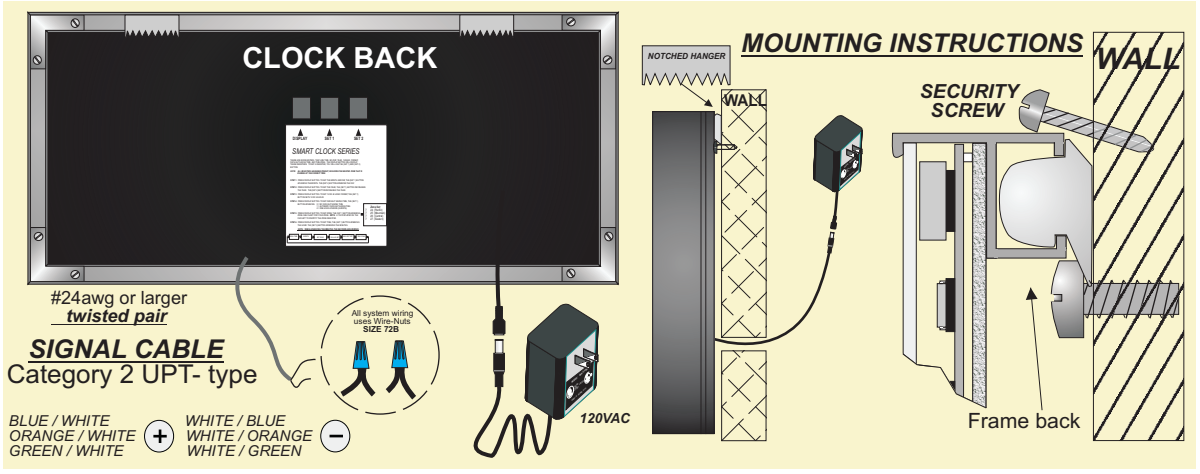

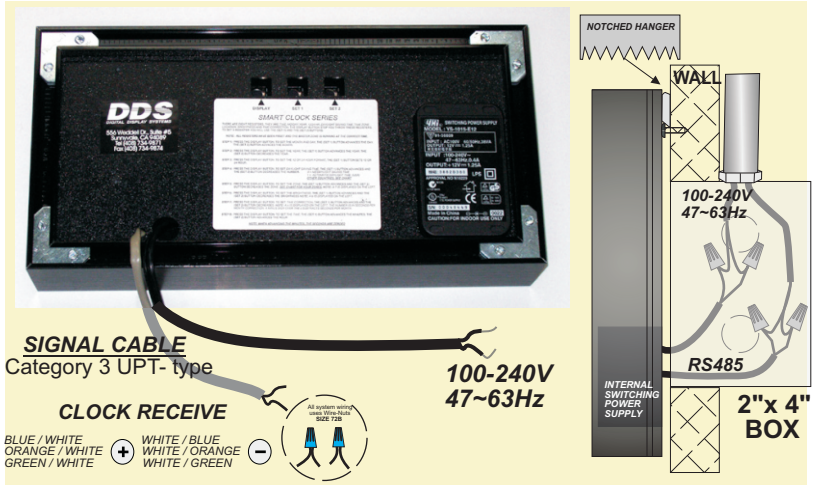

CLOCK SYSTEM SETUP

BRS-42440-4

All system wiring uses Wire-Nuts SIZE 72B

(+) SIDE
BLUE
ORANGE
GREEN

TO CLOCKS

TX

(-) SIDE
WHITE/BLUE
WHITE/ORANGE
WHITE/GREEN

MRS-25/PC

RS-485 SIGNAL LINE

TIME ZONE CLOCK

DAC-92412VY/IN

RS-485 SIGNAL LINE UP TO 7,000ft. TWISTED PAIR.

RS-485 SIGNAL LINE

BRS-42425/IN

DAC-312407

BRS-62425/IN