




# BET-109940-D-IRR

## SPECIFICATIONS

- TYPE: ----- DIGITAL
- DISPLAY: ----- 10-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
- CHARACTER HEIGHT: ----- 4" (101.6mm) DAYS / HR / MIN / SEC
- VISIBILITY: ----- 250 Ft. (76.2 METERS)
- POWER REQUIREMENTS: - 100-240V 50~60Hz (**12vdc Switching transformer**).
- FRAME: ----- ALUMINUM (BLACK ANODIZED FINISH)
- DIMENSIONS: ----- 8.25" x 30.25" x 1.5" (*approximate dimensions*)
- WEIGHT: ----- 10 lbs.
- OPERATING TEMP.: ----- -17° TO 190° F
- HUMIDITY: ----- 0% TO 95% NON-CONDENSING
- FUNCTION: ----- 10-DIG DAY, 2-DIG HR / MIN / SEC, INFRARED  
 REMOTE CONTROL FOR RUN / HOLD / RESET AND SET TIME

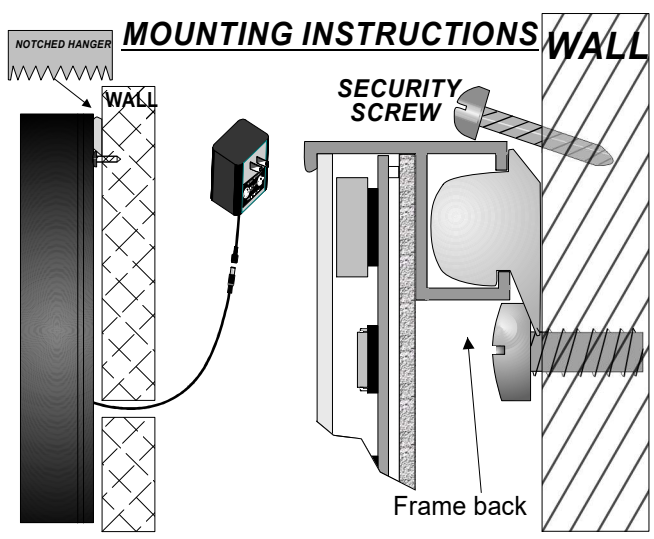



LED DOT WILL BE ON WHEN  
TIMER IS PAUSED.

**IF REMOTE BATTERIES ARE REPLACED, OR IF THE DISPLAY IS NOT RESPONDING, TRY REPROGRAMMING THE REMOTE CODE:**

1. Press and hold the **(SETUP)** button until LED light stays on, then release.
2. Press the **(TIMER)** button.
3. On keypad, enter the **timer code** (For example: **1252**). The LED will turn off after entering the last digit.
4. Repeat Steps 1-4 for the **(CLOCK)** button and code.

**CLOCK CODE — 0712**  
**TIMER CODE — 1252**

# BET-109940-D-IRR REMOTE INSTRUCTIONS

## TO PAUSE TIMER

Press **(TIMER)** button. Press **(RUN/HOLD)** button. An LED dot will show at the bottom right corner when the timer is paused.

## TO CHANGE COUNTDOWN TIME

Pause timer first. When timer is paused, press the **(ENTER)** button. The digits will start flashing. Enter the desired start time on the number pad in the format: Days, Hours, Minutes, Seconds. *See below for examples.* Press the **(ENTER)** key again to set time. Press the **(LOAD)** key to restore the last entered countdown time.

## TO RUN/START TIMER

When timer is paused, press the **(RUN/HOLD)** button. LED dot at bottom right corner will turn off, and timer will start counting down.

## TO RESET TIMER TO ZERO

Pause timer first. Press **(STOP)** button to reset.

## FORMAT EXAMPLES:

INPUT	COUNT DOWN START TIME
1225124500	1225 DAYS, 12 HOURS, 45 MINUTES
1050000	1 DAY, 5 HOURS
240000	24 HOURS
3000	30 MINUTES
<b>MAX VALUE: 9999235959</b>	<b>MAX VALUE: 9999 DAYS, 23 HOURS, 59 MINUTES, 59 SECONDS</b>