





# BTZ-42425-4VR

## SPECIFICATIONS



**TYPE:** ----- DIGITAL  
**DISPLAY:** ----- 4-DIGIT, 7 seg. **TIME** in **RED**  
**CHARACTER HEIGHT:** ----- 2.5" (63.5mm) HR / MIN  
**VISIBILITY:** ----- 125 ft (38.10 Meters)  
**POWER REQUIREMENTS:** ----- 100-240V 50~60 Hz (**12vdc SWITCHING POWER SUPPLY**).  
**FRAME:** ----- ALUMINUM (**BLACK ANODIZED FINISH**)  
**DIMENSIONS:** ----- 7.25" x 55.25" x 1.5"  
**WEIGHT:** ----- 10 lbs.  
**OPERATING TEMP.:** ----- -17° TO 190° F  
**HUMIDITY:** ----- 0% TO 95% NON-CONDENSING  
**OPERATING MODE:** ----- AUTOMATIC DAY LIGHT SAVINGS, 31 TIME ZONES, 10yr BATTERY BACKUP WITH 1sec A YEAR ACCURACY, NON-GLARE LENS, EYELET AND SAW TOOTH SURFACE MOUNT, REMOTE CONTROL SETUP

**1 SEC A YEAR ACCURATE (TCXO)\***  
 ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL TO GET THE ONE SEC A YEAR ACCURACY. **World's Most Accurate RTC**  
\* May vary based on external temperatures

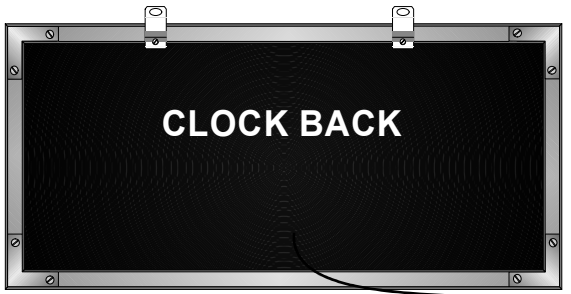

1.8", 2.5" and 4" DIGIT SIZE  
 12 OR 24 HOUR FORMAT  
 2 TO 24 ZONES  
 NON GLARE LENS  
 SUPER BRIGHT LEDS  
 CUSTOM LETTERING TO YOUR SPECIFICATION  
 ALUMINUM FRAME SURFACE MOUNT OR FLUSH  
 10 YEAR LITHIUM BATTERY MEMORY BACKUP  
 AUTOMATIC DAY LIGHT CORRECTION (*Standard*)  
 INFRARED REMOTE CONTROL (*Standard*)  
 ONE SEC A YEAR ACCURACY (TCXO) (*Standard*)  
**EXTERNAL TRANSFORMER FOR SAFETY AND EASE OF MAINTENANCE.**

