



# BTZ-42440-2VR

## SPECIFICATIONS

**TYPE:** ----- DIGITAL  
**DISPLAY:** ----- 4-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED  
**CHARACTER HEIGHT:** ----- 4.0" (101.6 mm) HR/MIN  
**VISIBILITY:** ----- 225 Ft. (68.58 METERS)  
**POWER REQUIREMENTS:** 100-240V 50~60 Hz (12vdc Switching Supply)  
**FRAME:** ----- ALUMINUM (BLACK ANODIZED FINISH)  
**DIMENSIONS:** ----- 10.25" x 30.25" x 1.5"  
**WEIGHT:** ----- 5 lbs.  
**OPERATING TEMP.:** ----- -17° TO 190° F  
**HUMIDITY:** ----- 0% TO 95% NON-CONDENSING  
**OPERATING MODE:** ----- SYNCHRONIZED ZONES WITH ONE MASTER SET ZONE.  
 AUTOMATIC DAY LIGHT SAVINGS, 31 TIME ZONES, 10yr MEMORY BACKUP WITH 1 SEC a YEAR  
 ACCURACY, NON-GLARE LENS, EYELET AND SAW TOOTH SURFACE MOUNT, INFRARED REMOTE


ALL CLOCKS USE THE  
 DALLAS DS32 SERIES  
 RTC PARTS, AND OUR  
 FIRMWARE CONTROL,  
 TO GET THE ONE SEC  
 A YEAR ACCURACY.




**1 SEC A YEAR ACCURATE (TCXO)**



12 OR 24 HOUR FORMAT  
 NON GLARE LENS  
 SUPER BRIGHT LEDS  
 CUSTOM LETTERING TO YOUR SPECIFICATION  
 ALUMINUM FRAME SURFACE MOUNT OR FLUSH  
 10 YEAR LITHIUM BATTERY BACKUP (Standard)  
 AUTOMATIC DAY LIGHT CORRECTION (Standard)  
 INFRARED REMOTE CONTROL (Standard)  
 ONE SEC A YEAR ACCURACY (TCXO) (Standard)



## MOUNTING INSTRUCTIONS

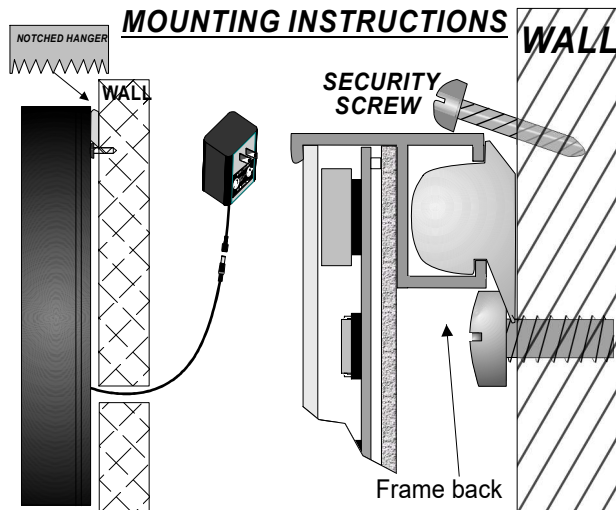



# BTZ-42440-2VG



## SPECIFICATIONS

**TYPE:** ----- DIGITAL  
**DISPLAY:** ----- 4-DIGIT, 7 SEGMENT GREEN SUPER BRIGHT LED  
**CHARACTER HEIGHT:** ----- 4.0" (101.6 mm) HR/MIN  
**VISIBILITY:** ----- 225 Ft. (68.58 METERS)  
**POWER REQUIREMENTS:** 100-240V 50~60 Hz (12vdc Switching Supply)  
**FRAME:** ----- ALUMINUM (BLACK ANODIZED FINISH)  
**DIMENSIONS:** ----- 10.25" x 30.25" x 1.5"  
**WEIGHT:** ----- 5 lbs.  
**OPERATING TEMP.:** ----- -17° TO 190° F  
**HUMIDITY:** ----- 0% TO 95% NON-CONDENSING  
**OPERATING MODE:** ----- SYNCHRONIZED ZONES WITH ONE MASTER SET ZONE.  
 AUTOMATIC DAY LIGHT SAVINGS, 31 TIME ZONES, 10yr MEMORY BACKUP WITH 1 SEC a YEAR  
 ACCURACY, NON-GLARE LENS, EYELET AND SAW TOOTH SURFACE MOUNT, INFRARED REMOTE

ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY. **1 SEC A YEAR ACCURATE (TCXO)**  
 Gold or Hot  
 World's Most Accurate RTC



12 OR 24 HOUR FORMAT  
 NON GLARE LENS  
 SUPER BRIGHT LEDS  
 CUSTOM LETTERING TO YOUR SPECIFICATION  
 ALUMINUM FRAME SURFACE MOUNT OR FLUSH  
 10 YEAR LITHIUM BATTERY BACKUP (Standard)  
 AUTOMATIC DAY LIGHT CORRECTION (Standard)  
 INFRARED REMOTE CONTROL (Standard)  
 ONE SEC A YEAR ACCURACY (TCXO) (Standard)

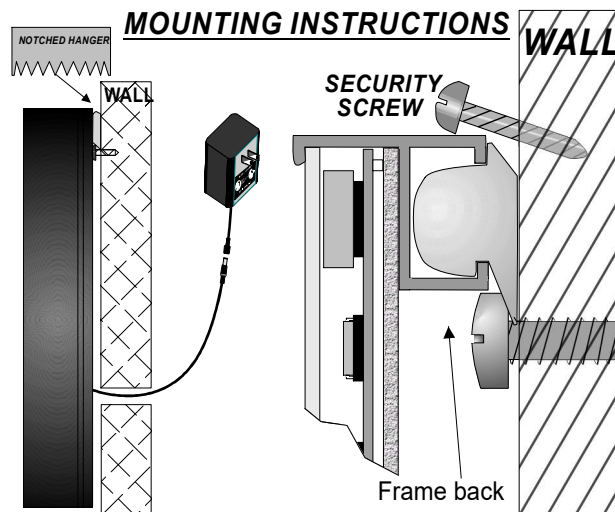



# BTZ-42440-2VB

## SPECIFICATIONS

**TYPE:** ----- DIGITAL  
**DISPLAY:** ----- 4-DIGIT, 7 SEGMENT BLUE SUPER BRIGHT LED  
**CHARACTER HEIGHT:** ----- 4.0" (101.6 mm) HR/MIN  
**VISIBILITY:** ----- 225 Ft. (68.58 METERS)  
**POWER REQUIREMENTS:** 100-240V 50~60 Hz (12vdc Switching Supply)  
**FRAME:** ----- ALUMINUM (BLACK ANODIZED FINISH)  
**DIMENSIONS:** ----- 10.25" x 30.25" x 1.5"  
**WEIGHT:** ----- 5 lbs.  
**OPERATING TEMP.:** ----- -17° TO 190° F  
**HUMIDITY:** ----- 0% TO 95% NON-CONDENSING  
**OPERATING MODE:** ----- SYNCHRONIZED ZONES WITH ONE MASTER SET ZONE.  
 AUTOMATIC DAY LIGHT SAVINGS, 31 TIME ZONES, 10yr MEMORY BACKUP WITH 1 SEC a YEAR  
 ACCURACY, NON-GLARE LENS, EYELET AND SAW TOOTH SURFACE MOUNT, INFRARED REMOTE

ALL CLOCKS USE THE  
 DALLAS DS32 SERIES  
 RTC PARTS, AND OUR  
 FIRMWARE CONTROL,  
 TO GET THE ONE SEC  
 A YEAR ACCURACY.

Gold or Hot  
 World's Most Accurate RTC  
 1 SEC A YEAR ACCURATE (TCXO)



12 OR 24 HOUR FORMAT  
 NON GLARE LENS  
 SUPER BRIGHT LEDS  
 CUSTOM LETTERING TO YOUR SPECIFICATION  
 ALUMINUM FRAME SURFACE MOUNT OR FLUSH  
 10 YEAR LITHIUM BATTERY BACKUP (Standard)  
 AUTOMATIC DAY LIGHT CORRECTION (Standard)  
 INFRARED REMOTE CONTROL (Standard)  
 ONE SEC A YEAR ACCURACY (TCXO) (Standard)

