



BTZ-42440-3VR

SPECIFICATIONS


DIGIT SIZE **NUMBER OF ZONES** **WHITE VINYL ZONE NAMES** **TIME COLOR**

TYPE: ----- DIGITAL
DISPLAY: ----- 4-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
CHARACTER HEIGHT: ----- 4" (101.6 mm) HR/MIN
VISIBILITY: ----- 250 Ft. (76.2 METERS)
POWER REQUIREMENTS: -- 110-240V 50~60Hz (**12vdc Switching Power Supply**)
FRAME: ----- ALUMINUM (BLACK ANODIZED FINISH)
DIMENSIONS: ----- 10.25" x 48.25" x 1.5"
WEIGHT: ----- 6 lbs.
OPERATING TEMP.: ----- -17° TO 182° F
HUMIDITY: ----- 0% TO 95% NON-CONDENSING
OPERATING MODE: ----- SYNCHRONIZED ZONES WITH ONE MASTER SET ZONE.
 AUTOMATIC DAY LIGHT SAVINGS, 31 TIME ZONES, 10yr MEMORY BACKUP WITH 1 SEC a YEAR
 ACCURACY, NON-GLARE LENS, EYELET AND SAW TOOTH SURFACE MOUNT, INFRARED REMOTE



ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY.
1 SEC A YEAR ACCURATE (TCXO)
 Cold or Hot
 World's Most Accurate RTC

1.8", 2.5" and 4" DIGIT SIZE
 12 OR 24 HOUR FORMAT
 2 TO 24 ZONES
 NON GLARE LENS
 SUPER BRIGHT LEDS
 CUSTOM LETTERING TO YOUR SPECIFICATION
 ALUMINUM FRAME SURFACE MOUNT OR FLUSH
 10 YEAR LITHIUM BATTERY BACKUP (**Standard**)
 AUTOMATIC DAY LIGHT CORRECTION (**Standard**)
 INFRARED REMOTE CONTROL (**Standard**)
 ONE SEC A YEAR ACCURACY (TCXO) (**Standard**)
 EXTERNAL TRANSFORMER FOR SAFETY AND EASE OF MAINTENANCE.

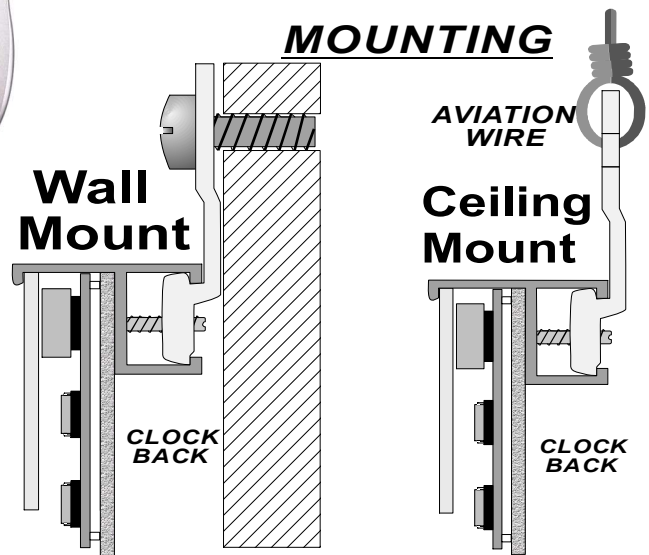



BTZ-42440-3VB

SPECIFICATIONS


DIGIT SIZE **NUMBER OF ZONES** **WHITE VINYL ZONE NAMES** **TIME COLOR**

TYPE: ----- DIGITAL
DISPLAY: ----- 4-DIGIT, 7 SEGMENT BLUE SUPER BRIGHT LED
CHARACTER HEIGHT: ----- 4" (101.6 mm) HR/MIN
VISIBILITY: ----- 250 Ft. (76.2 METERS)
POWER REQUIREMENTS: -- 110-240V 50~60Hz (**12vdc Switching Power Supply**)
FRAME: ----- ALUMINUM (BLACK ANODIZED FINISH)
DIMENSIONS: ----- 10.25" x 48.25" x 1.5"
WEIGHT: ----- 6 lbs.
OPERATING TEMP.: ----- -17° TO 182° F
HUMIDITY: ----- 0% TO 95% NON-CONDENSING
OPERATING MODE: ----- SYNCHRONIZED ZONES WITH ONE MASTER SET ZONE.
 AUTOMATIC DAY LIGHT SAVINGS, 31 TIME ZONES, 10yr MEMORY BACKUP WITH 1 SEC a YEAR ACCURACY, NON-GLARE LENS, EYELET AND SAW TOOTH SURFACE MOUNT, INFRARED REMOTE



ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY. **1 SEC A YEAR ACCURATE (TCXO)**
 Cold or Hot
 World's Most Accurate RTC

1.8", 2.5" and 4" DIGIT SIZE
 12 OR 24 HOUR FORMAT
 2 TO 24 ZONES
 NON GLARE LENS
 SUPER BRIGHT LEDS
 CUSTOM LETTERING TO YOUR SPECIFICATION
 ALUMINUM FRAME SURFACE MOUNT OR FLUSH
 10 YEAR LITHIUM BATTERY BACKUP (**Standard**)
 AUTOMATIC DAY LIGHT CORRECTION (**Standard**)
 INFRARED REMOTE CONTROL (**Standard**)
 ONE SEC A YEAR ACCURACY (TCXO) (**Standard**)
 EXTERNAL TRANSFORMER FOR SAFETY AND EASE OF MAINTENANCE.

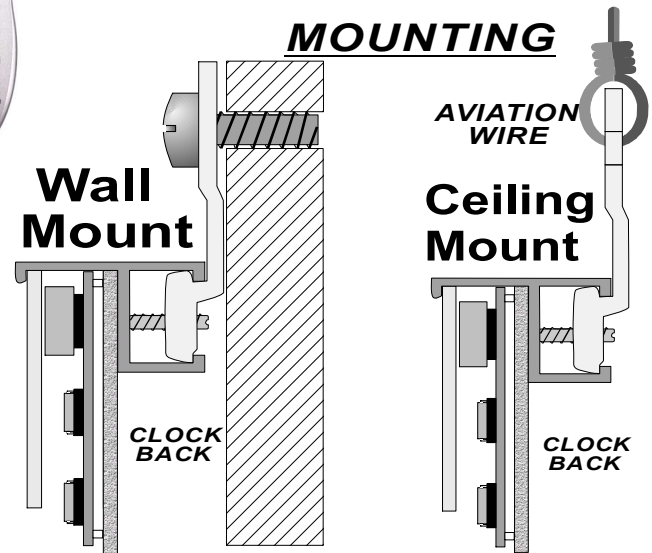



BTZ-42440-3VG

SPECIFICATIONS

DIGIT SIZE **NUMBER OF ZONES** **WHITE VINYL ZONE NAMES** **TIME COLOR**

TYPE: ----- DIGITAL
DISPLAY: ----- 4-DIGIT, 7 SEGMENT GREEN SUPER BRIGHT LED
CHARACTER HEIGHT: ----- 4" (101.6 mm) HR/MIN
VISIBILITY: ----- 250 Ft. (76.2 METERS)
POWER REQUIREMENTS: -- 110-240V 50~60Hz (**12vdc Switching Power Supply**)
FRAME: ----- ALUMINUM (BLACK ANODIZED FINISH)
DIMENSIONS: ----- 10.25" x 48.25" x 1.5"
WEIGHT: ----- 6 lbs.
OPERATING TEMP.: ----- -17° TO 182° F
HUMIDITY: ----- 0% TO 95% NON-CONDENSING
OPERATING MODE: ----- SYNCHRONIZED ZONES WITH ONE MASTER SET ZONE.
 AUTOMATIC DAY LIGHT SAVINGS, 31 TIME ZONES, 10yr MEMORY BACKUP WITH 1 SEC a YEAR
 ACCURACY, NON-GLARE LENS, EYELET AND SAW TOOTH SURFACE MOUNT, INFRARED REMOTE



ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY. **1 SEC A YEAR ACCURATE (TCXO)**
 Cold or Hot
 World's Most Accurate RTC

1.8", 2.5" and 4" DIGIT SIZE
 12 OR 24 HOUR FORMAT
 2 TO 24 ZONES
 NON GLARE LENS
 SUPER BRIGHT LEDS
 CUSTOM LETTERING TO YOUR SPECIFICATION
 ALUMINUM FRAME SURFACE MOUNT OR FLUSH
 10 YEAR LITHIUM BATTERY BACKUP (**Standard**)
 AUTOMATIC DAY LIGHT CORRECTION (**Standard**)
 INFRARED REMOTE CONTROL (**Standard**)
 ONE SEC A YEAR ACCURACY (TCXO) (**Standard**)
 EXTERNAL TRANSFORMER FOR SAFETY AND EASE OF MAINTENANCE.

