

BSA-41218



BSA-41225




BSA-41240



SPECIFICATIONS

TYPE: -----	DIGITAL
DISPLAY: -----	4-DIGIT, 7-SEGMENT SUPER BRIGHT RED LED'S
CHARACTER HEIGHT: -----	1.8" (45.72mm) HR/MIN (BSA-41218 / BSA-42418) 2.5" (63.5mm) HR/MIN (BSA-41225 / BSA-42425) 4.0" (101.6mm) HR/MIN (BSA-41240 / BSA-42440)
VISIBILITY: -----	75 feet (22.86 meters) (BSA-41218 / BSA-42418) 125 feet (38.10 meters) (BSA-41225 / BSA-42425) 225 feet (68.58 meters) (BSA-41240 / BSA-42440).
POWER REQUIREMENTS: -----	100-240V 60-50Hz (12vdc SWITCHING TRANSFORMER)
FRAME: -----	ALUMINUM (BLACK ANODIZED FINISH)
DIMENSIONS: -----	12.25" x 6.25" x 1.5" (BSA-41218 / BSA-42418) 12.25" x 6.25" x 1.5" (BSA-41225 / BSA-42425) 15.25" x 8.25" x 1.5" (BSA-41240 / BSA-42440)
WEIGHT: -----	4-5 lbs
OPERATING TEMP: -----	-17° F to 190° F
HUMIDITY: -----	0% TO 95% NON-CONDENSING

12 OR 24 HOUR FORMAT, NON-CLARE LENS, SUPER BRIGHT LED'S, ALUMINUM FRAME
10 YEAR LITHIUM BATTERY MEMORY BACKUP (STANDARD)
AUTOMATIC DAY LIGHT CORRECTION (STANDARD)
ONE SECOND YEAR ACCURACY (TCXO)

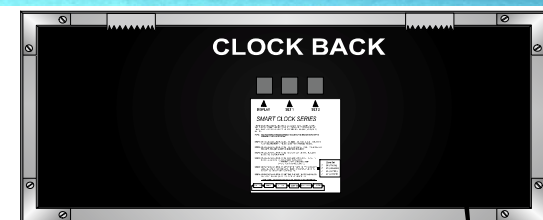

ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL TO GET THE ONE SEC A YEAR ACCURACY.

World's Most Accurate RTC

NEW 1 SEC A YEAR ACCURATE (TCXO)

120VAC

MOUNTING INSTRUCTIONS

