

# DSA-42470-R

## SPECIFICATIONS



TYPE: -----	DIGITAL
DISPLAY: -----	4-DIGIT, 7 SEGMENT SUPER BRIGHT LED in RED
CHARACTER HEIGHT: -----	7" (177.8mm) HR / MIN
VISIBILITY: -----	500 + Ft. (152.4 Meters)
POWER REQUIREMENTS: --	100-240V 50~60Hz (12vdc Switching Power Supply)
FRAME: -----	ALUMINUM (BLACK ANODIZED FINISH)
DIMENSIONS: -----	10.25" x 28.25" x 1.5"
WEIGHT: -----	6.50 lbs.
OPERATING TEMP.: -----	-17° TO 195° F
HUMIDITY: -----	0% TO 95% NON-CONDENSING

### NEW 1 SEC A YEAR ACCURATE (TCXO)

ALL CLOCKS US THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL TO GET THE ONE SEC A YEAR ACCURACY.




NOTCHED / EYELET HANGERS AND WALL TRANSFORMER ARE STANDARD

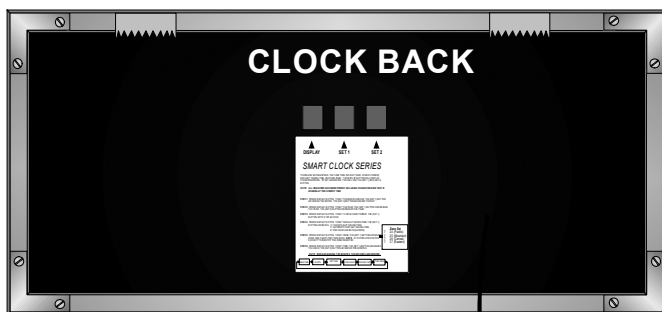

- 12 OR 24 HOUR FORMAT
- NON GLARE LENS
- SUPER BRIGHT LEDs
- ALUMINUM FRAME

- 10 YEAR LITHIUM BATTERY BACKUP (Standard)
- AUTOMATIC DAY LIGHT CORRECTION (Standard)
- ONE SEC A YEAR ACCURACY (TCXO) (Standard)

## MOUNTING INSTRUCTIONS

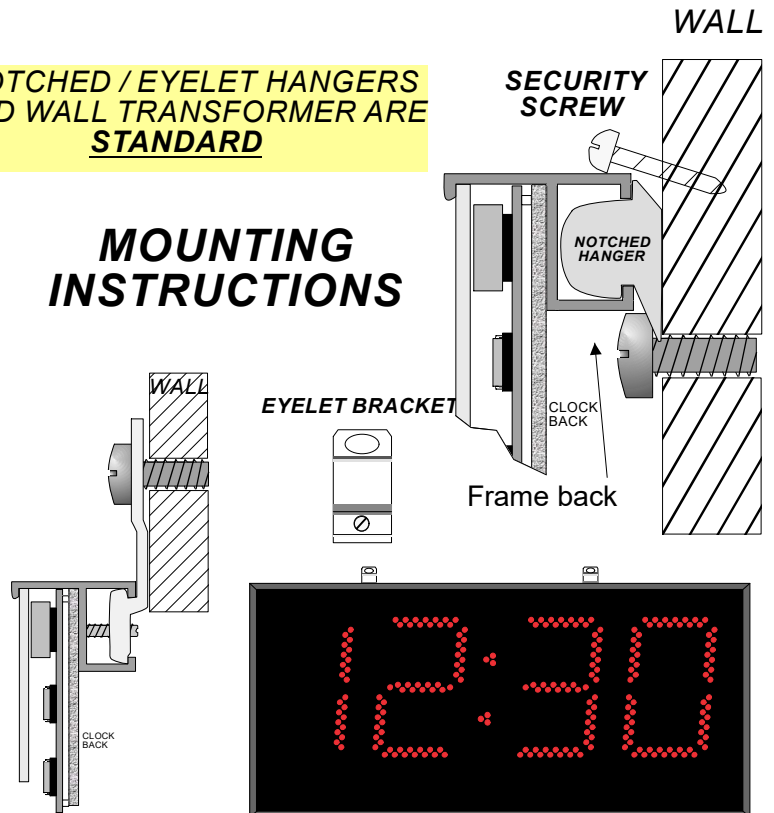



# DSA-42470-B

## SPECIFICATIONS



TYPE: -----	DIGITAL
DISPLAY: -----	4-DIGIT, 7 SEGMENT SUPER BRIGHT LED in BLUE
CHARACTER HEIGHT: -----	7" (177.8mm) HR / MIN
VISIBILITY: -----	500 + Ft. (152.4 Meters)
POWER REQUIREMENTS: --	100-240V 50~60Hz (12vdc Switching Power Supply)
FRAME: -----	ALUMINUM (BLACK ANODIZED FINISH)
DIMENSIONS: -----	10.25" x 28.25" x 1.5"
WEIGHT: -----	6.50 lbs.
OPERATING TEMP.: -----	-17° TO 195° F
HUMIDITY: -----	0% TO 95% NON-CONDENSING

### NEW 1 SEC A YEAR ACCURATE (TCXO)

ALL CLOCKS US THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL TO GET THE ONE SEC A YEAR ACCURACY.




NOTCHED / EYELET HANGERS AND WALL TRANSFORMER ARE STANDARD

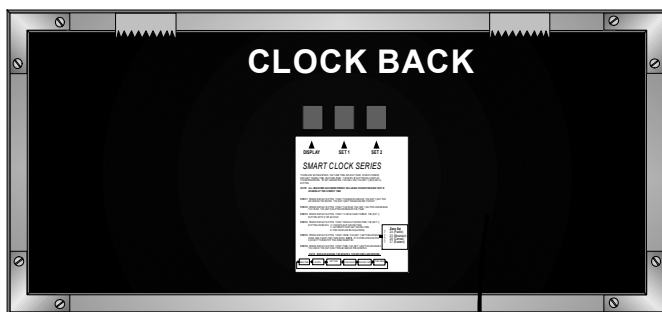

- 12 OR 24 HOUR FORMAT
- NON GLARE LENS
- SUPER BRIGHT LEDs
- ALUMINUM FRAME

- 10 YEAR LITHIUM BATTERY BACKUP (Standard)
- AUTOMATIC DAY LIGHT CORRECTION (Standard)
- ONE SEC A YEAR ACCURACY (TCXO) (Standard)

## MOUNTING INSTRUCTIONS

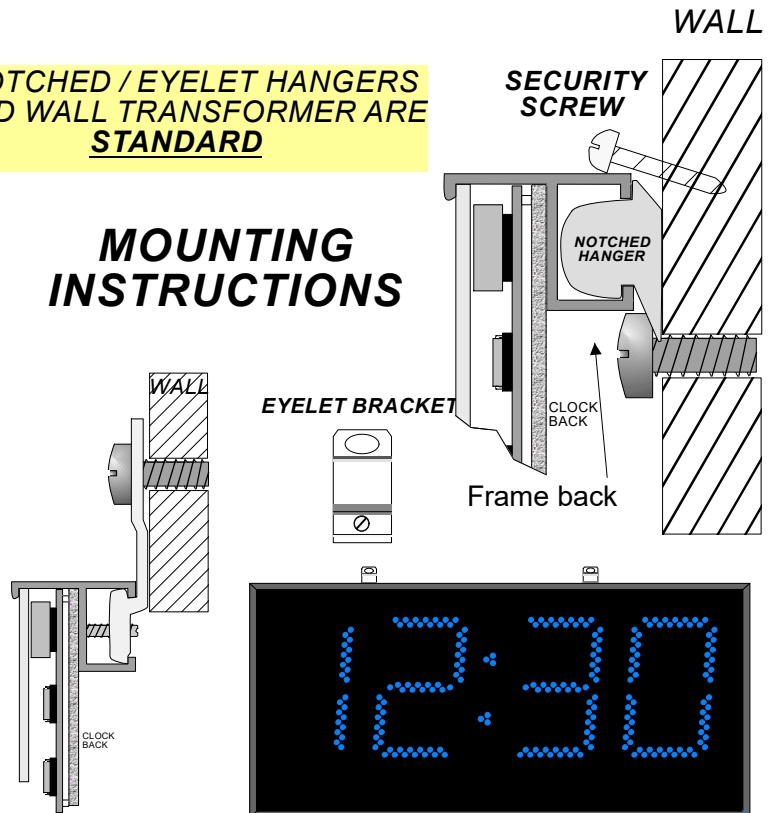



# DSA-42470-G

## SPECIFICATIONS



TYPE: -----	DIGITAL
DISPLAY: -----	4-DIGIT, 7 SEGMENT SUPER BRIGHT LED in GREEN
CHARACTER HEIGHT: -----	7" (177.8mm) HR / MIN
VISIBILITY: -----	500 + Ft. (152.4 Meters)
POWER REQUIREMENTS: --	100-240V 50~60Hz (12vdc Switching Power Supply)
FRAME: -----	ALUMINUM (BLACK ANODIZED FINISH)
DIMENSIONS: -----	10.25" x 28.25" x 1.5"
WEIGHT: -----	6.50 lbs.
OPERATING TEMP.: -----	-17° TO 195° F
HUMIDITY: -----	0% TO 95% NON-CONDENSING

### NEW 1 SEC A YEAR ACCURATE (TCXO)

ALL CLOCKS US THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL TO GET THE ONE SEC A YEAR ACCURACY.




NOTCHED / EYELET HANGERS AND WALL TRANSFORMER ARE STANDARD

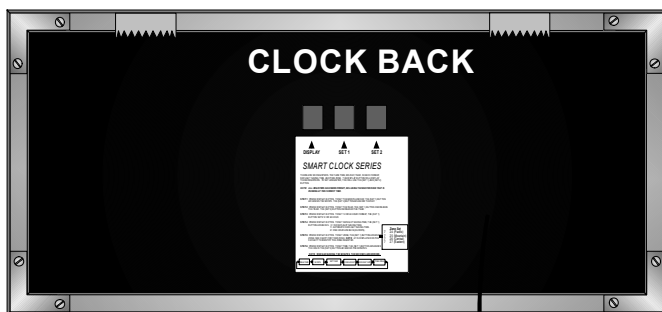


- 12 OR 24 HOUR FORMAT
- NON GLARE LENS
- SUPER BRIGHT LEDs
- ALUMINUM FRAME

- 10 YEAR LITHIUM BATTERY BACKUP (Standard)
- AUTOMATIC DAY LIGHT CORRECTION (Standard)
- ONE SEC A YEAR ACCURACY (TCXO) (Standard)

## MOUNTING INSTRUCTIONS

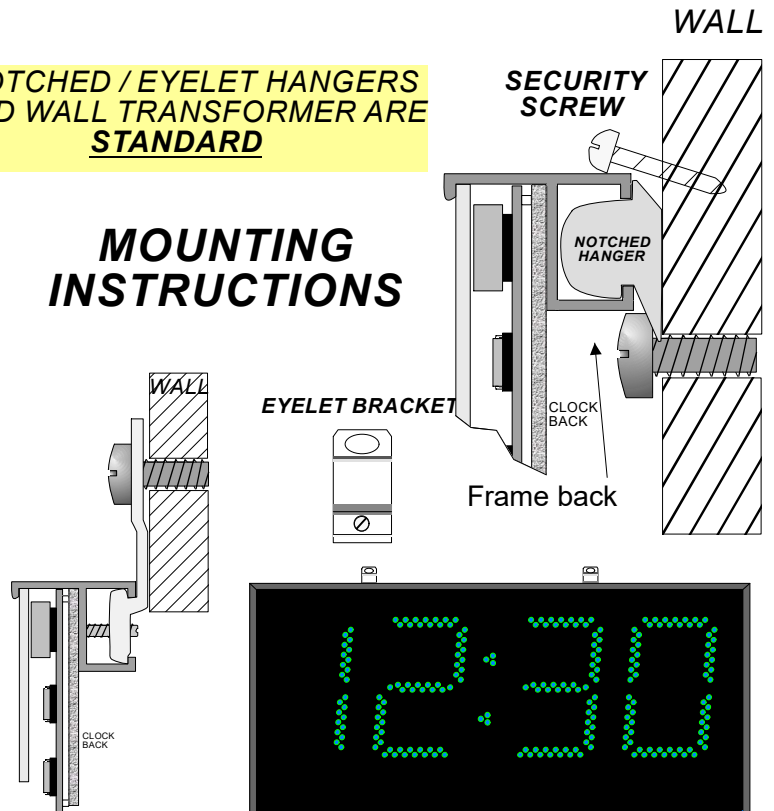

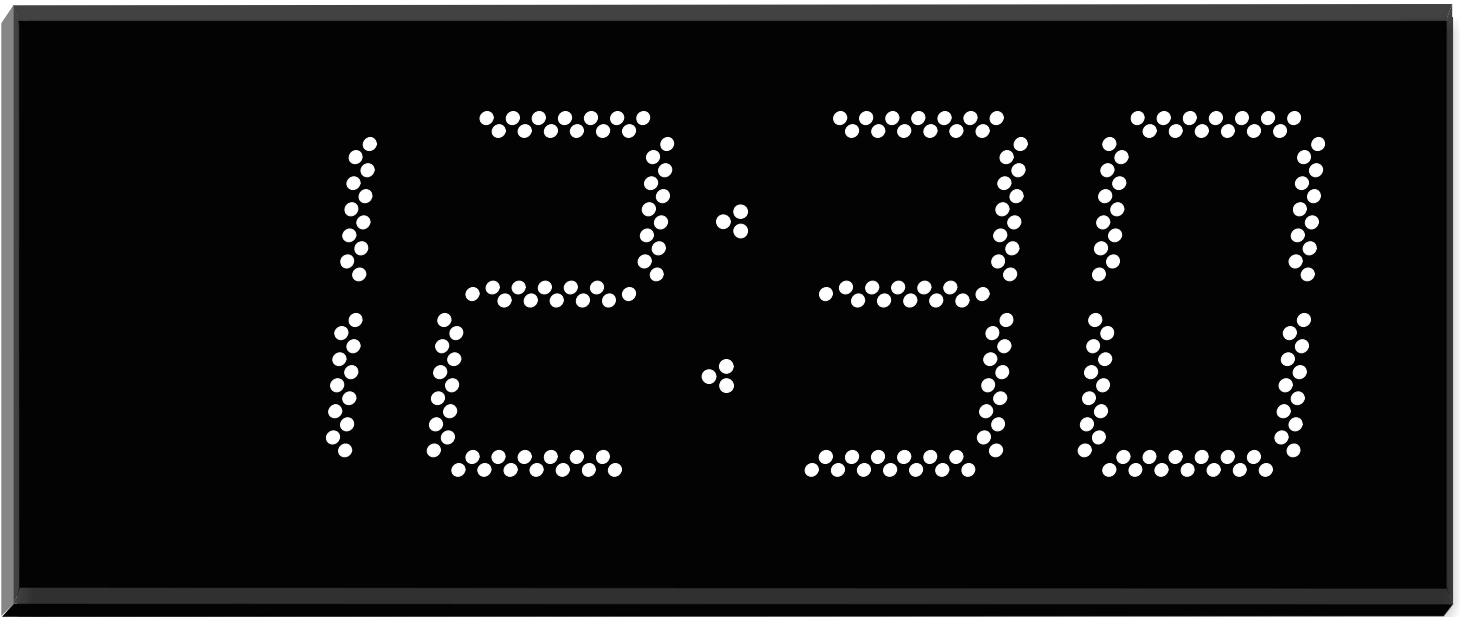

# DSA-42470-W

## SPECIFICATIONS



<b>TYPE:</b> -----	DIGITAL
<b>DISPLAY:</b> -----	4-DIGIT, 7 SEGMENT SUPER BRIGHT LED in WHITE
<b>CHARACTER HEIGHT:</b> -----	7" (177.8mm) HR / MIN
<b>VISIBILITY:</b> -----	500 + Ft. (152.4 Meters)
<b>POWER REQUIREMENTS:</b> --	100-240V 50~60Hz (12vdc Switching Power Supply)
<b>FRAME:</b> -----	ALUMINUM (BLACK ANODIZED FINISH)
<b>DIMENSIONS:</b> -----	10.25" x 28.25" x 1.5"
<b>WEIGHT:</b> -----	6.50 lbs.
<b>OPERATING TEMP.:</b> -----	-17° TO 195° F
<b>HUMIDITY:</b> -----	0% TO 95% NON-CONDENSING

### NEW 1 SEC A YEAR ACCURATE (TCXO)

ALL CLOCKS US THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL TO GET THE ONE SEC A YEAR ACCURACY.



NOTCHED / EYELET HANGERS AND WALL TRANSFORMER ARE STANDARD

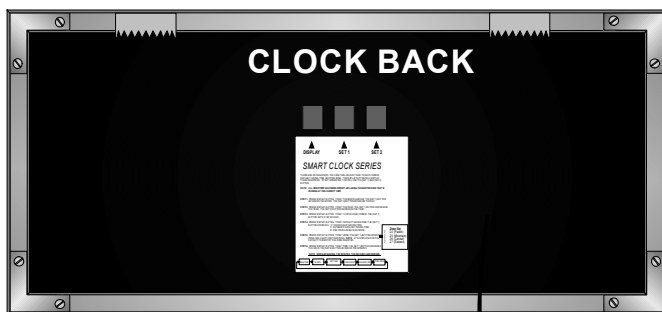

12 OR 24 HOUR FORMAT  
NON GLARE LENS  
SUPER BRIGHT LEDs  
ALUMINUM FRAME

10 YEAR LITHIUM BATTERY BACKUP (Standard)  
AUTOMATIC DAY LIGHT CORRECTION (Standard)  
ONE SEC A YEAR ACCURACY (TCXO) (Standard)

## MOUNTING INSTRUCTIONS

