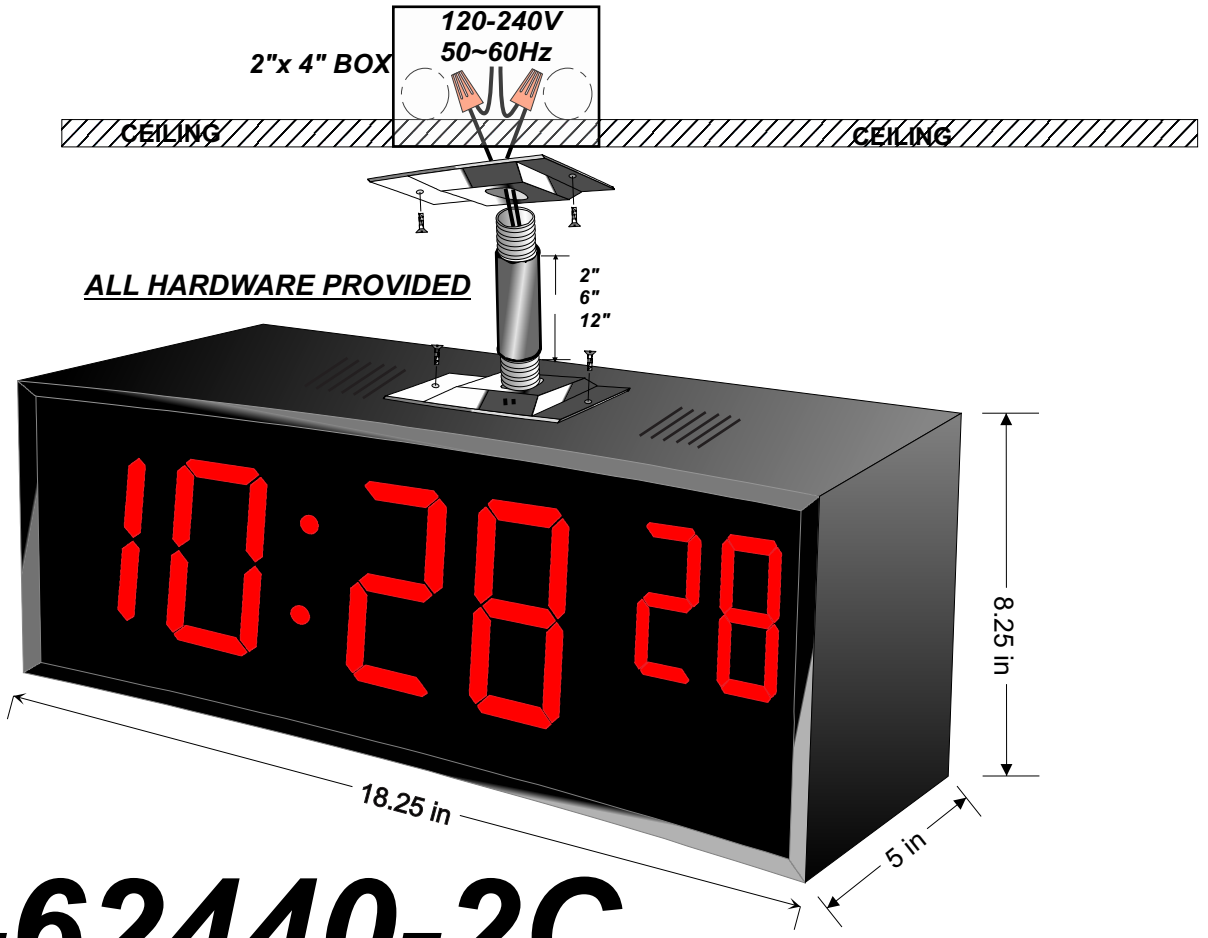

BSA-62440-2C

SIX DIGIT HRS/MIN/SEC	12 = 12 HOUR 24 = 24 HOUR	DISPLAY SIZE	TWO SIDE CEILING MOUNT

SPECIFICATIONS

TYPE: ---------- DIGITAL
DISPLAY: ---------- 6-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
CHARACTER HEIGHT: ------ 4" (101.6 mm) HR. MIN.2.5" (63.5) SEC.
VISIBILITY: ---------- 250 Ft. (76.2 METERS)
POWER REQUIREMENTS:-- 100-240V 47~63Hz ***(12vdc INTERNAL POWER SUPPLY)***
FRAME: ---------- ALUMINUM *(BLACK ANODIZED FINISH)*
DIMENSIONS: ---------- 8.25" x 18.25" x 5"
WEIGHT: ---------- 7.25 lb.
OPERATING TEMP.: --------- -17° TO 182° F
HUMIDITY: ---------- 0% TO 95% NON-CONDENSING
OPERATING MODE:---------- 12/24 HR. SELECTABLE AND ZONE SELECTIVITY

12 OR 24 HOUR FORMAT
NON GLARE LENS
SUPER BRIGHT LEDS
ALUMINUM FRAME
10 YEAR LITHIUM BATTERY BACKUP ***(Standard)***
AUTOMATIC DAY LIGHT CORRECTION ***(Standard)***
ONE SEC A YEAR ACCURACY (TCXO) ***(Standard)***

ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY.

1 SEC A YEAR ACCURATE (TCXO)