




SPECIFICATIONS

BPC-49940

TYPE:-----	DIGITAL
DISPLAY:-----	4-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
CHARACTER HEIGHT:-----	4" (101.6 mm) 9 THOUSAND 9 HUNDRED AND 99
VISIBILITY:-----	250 Ft. (76.2 METERS)
POWER REQUIREMENTS:---	100-240V 50~60Hz (12vdc SWITCHING TRANSFORMER)
FRAME:-----	8.25" x 15.25" x 1.5" ALUMINUM (BLACK ANODIZED)
WEIGHT:-----	4.5 lbs.
OPERATING TEMP.:-----	-17° TO 182° F
HUMIDITY:-----	0% TO 95% NON-CONDENSING
OPERATING MODE: -----	COUNT UP OR DOWN BY 1. FAST SET UP OR DOWN BY HOLDING KEY DOWN FOR OVER 5 SEC. HOLDING BOTH KEYS DOWN FOR 5 SEC RESETS TO ZERO.
ALTERNATIVE OPTIONS: -----	Infrared Remote control, Stainless Steel Wall Faceplate, Photosensitive IR Sensor, Metal Sensor, Wires Out for PLC connection

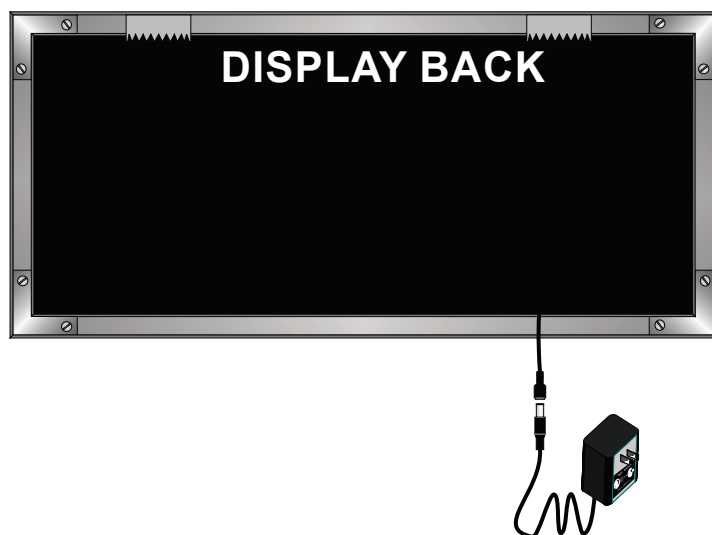

MOUNTING INSTRUCTIONS

